

## 3.1 Multifunction Monitoring



Application	Types	Monitoring	Monitoring ratings	Output contacts	Design
Multifunction monitoring, AC 15 ... 60 Hz / DC single phase	MRM11		U, I, P, f, cosφ	1 CO	35 mm
Multifunction monitoring, AC 15 ... 60 Hz / DC three phase	MRM32		U, I, P, f, cosφ	2 CO	35 mm

# MRM11


Multifunction monitoring relay AC/DC, single phase  
DIN Rail mounting according to DIN 43 880

## Type: MRM11/...V

Multifunctional monitoring relay for simultaneous measurement of current and voltage and monitoring of U, I, P,  $\cos\phi$  and f. Alarm delay setting. Alarm LED. Display for multimeter function, alarm signal and interactive parameter setting.

1 change-over alarm contact 5 A 250 V. Comfortable parameter setting.

## Monitoring function

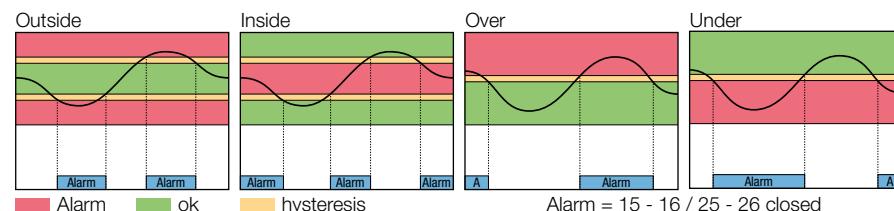

## Measuring circuit data

Voltage setting ranges AC / DC	0.1 ... 480 V / $\pm 0.1$ ... 690 V
Current setting ranges AC / DC	0.1 ... 5 A
Frequency	AC 50 ... 150 Hz
Input resistance U / I	1 M $\Omega$ / 5 M $\Omega$
Measured variables	U, I, f, P, S, $\cos\phi$

## Time data

Voltage failure buffering	ca. 30 ms
---------------------------	-----------

## Alarm contacts

Type / Material	1 CO / AgNi 0.15
Rated operational current	6 A
Max. inrush current	15 A
Max. switching voltage	250 V
Max. AC load AC-1 (Fig.1)	1250 VA
Max. DC load DC-1, 24 V / 220 V (Fig.2)	120 W / 25 W
Recommended min. contact load	10 mA / 10 V
Alarm delay setting time	0.1 ... 999.9 s (factory adjustment = 0.0 s)
Reset time setting range	0.1 ... 999.9 s (factory adjustment = 0.0 s)

## Power supply

	UC12-48V	UC110-240V
Nominal voltage AC/DC	12 ... 48 V	110 ... 240 V
Operating voltage range	10 ... 60 V	85 ... 250 V
AC frequency	16 ... 63 Hz	16 ... 63 Hz
Power consumption	1.6 W / 3.2 VA	1.5 W / 2.6 VA

## Insulation

Measuring input – Measuring input	1.5 kV 1 minute
Measuring input – Supply	2.0 kV 1 minute
Measuring input – Contact	2.0 kV 1 minute
Supply – Contact	2.0 kV 1 minute
Contact set – Contact set	1.5 kV 1 minute

## General specifications

Ambient temperature storage /operation	-40 ... +85 °C / -40 ... +60 °C LCD: -20 ... +60 °C
Mechanical life of contacts	30 x 10 <sup>6</sup> operations
Conductor cross section	Stranded wire 2.5 mm <sup>2</sup> , 2 x 1.5 mm <sup>2</sup>
Ingress protection degree	IP20, (electronics: IP40)
Max. screw torque	0.4 Nm
Housing material	Lexan EXL 9330
Weight	107 g

## Standard types

AC/DC 12-48 V, 15...60 Hz  
AC/DC 110-240 V, 15...60 Hz

MRM11/UC12-48V  
MRM11/UC110-240V



## Connection diagram




Fig.1 AC voltage endurance



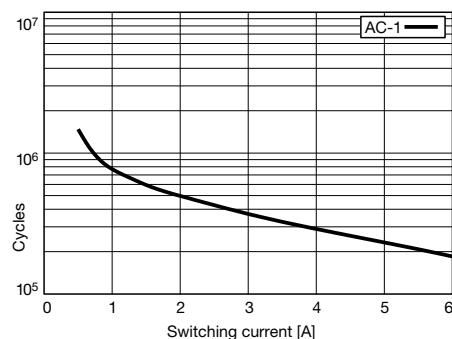


Fig. 2 DC load limit curve

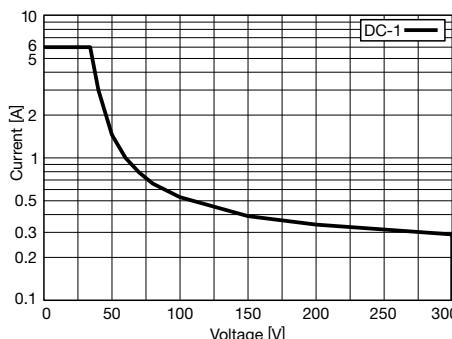

## Dimensions [mm]

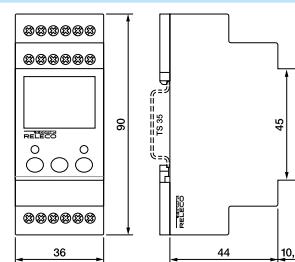

## Technical approvals, conformities



# MRM32


## Multifunction monitoring relay AC/DC, three phase DIN Rail mounting according to DIN 43 880

### Type: MRM32...V

Multifunctional monitoring relay for simultaneous measurement of current and voltage and monitoring of U, I, P,  $\cos\phi$  and f and  $\Delta\phi$ . Alarm delay setting. Alarm LED. Display for multimeter function, alarm signal and interactive parameter setting.

2 change-over alarm contacts 5 A 250 V. Comfortable parameter setting.

### Monitoring function

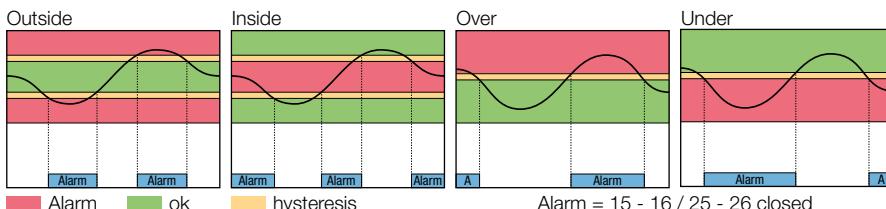

### Measuring circuit data

Voltage setting ranges AC / DC	0.1 ... 480 V / $\pm 0.1$ ... 690 V
Current setting ranges AC / DC	0.1 ... 5 A
Frequency	AC 15 ... 150 Hz
Input resistance U / I	1 M $\Omega$ / 5 M $\Omega$
Measured variables	U, I, f, P, S, $\cos\phi$ und $\Delta\phi$ (phase sequence)

### Time data

Voltage failure buffering	ca. 30 ms
---------------------------	-----------

### Contacts

Type / Material	2 CO / AgNi 0.15
Rated operational current	6 A
Max. inrush current	15 A
Max. switching voltage	250 V
Max. AC load AC-1 (Fig.1)	1250 VA
Max. DC load DC-1, 24 V / 220 V (Fig.2)	120 W / 25 W
Recommended min. contact load	10 mA / 10 V
Alarm delay setting time	0.1 ... 999.9 s (factory adjustment = 0.0 s)
Reset time setting range	0.1 ... 999.9 s (factory adjustment = 0.0 s)

### Power supply

	<b>UC12-48V</b>	<b>UC110-240V</b>
Nominal voltage AC/DC	12 ... 48 V	110 ... 240 V
Operating voltage range	10 ... 60 V	85 ... 250 V
AC frequency	16 ... 63 Hz	16 ... 63 Hz
Power consumption	1.6 W / 3.2 VA	1.5 W / 2.6 VA

### Insulation

Measuring input – Measuring input	1.5 kV 1 minute
Measuring input – Supply	2.0 kV 1 minute
Measuring input – Contact	2.0 kV 1 minute
Supply – Contact	2.0 kV 1 minute
Contact set – Contact set	1.5 kV 1 minute

### General specifications

Ambient temperature storage /operation	-40 ... +85 °C / -40 ...+60 °C
LCD: -20 ... +60 °C	
Mechanical life of contacts	30 x 10 <sup>6</sup> operations
Conductor cross section	Stranded wire 2.5 mm <sup>2</sup> , 2 x 1.5 mm <sup>2</sup>
Ingress protection degree	IP20, (electronics: IP40)
Max. screw torque	0.4 Nm
Housing material	Lexan EXL 9330
Weight	125 g

### Standard types

**AC/DC 12-48 V, 15...60 Hz**  
**AC/DC 110-240 V, 15...60 Hz**

**MRM32/UC12-48V**  
**MRM32/UC110-240V**



### Connection diagram




Fig.1 AC voltage endurance



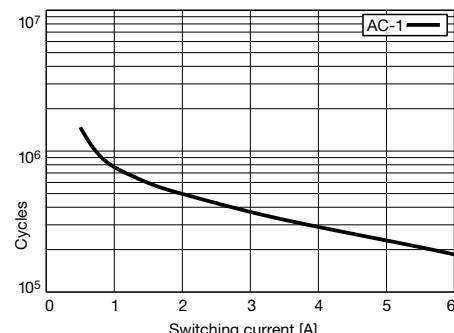


Fig. 2 DC load limit curve

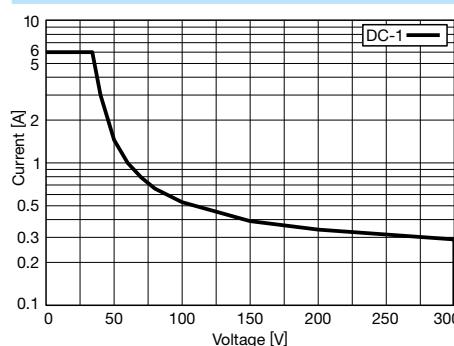

### Dimensions [mm]

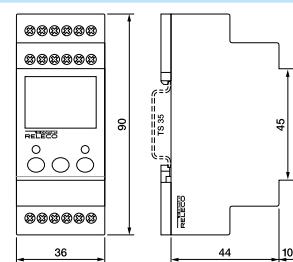

### Technical approvals, conformities



## Notes